



Analysis of the Effects of Developing New Energy Infrastructures

David Reichmuth
Sandia National Laboratories
Livermore, CA

AN002

This presentation does not contain any proprietary, confidential, or otherwise restricted information



Sandia is a multiprogram laboratory operated by Sandia Corporation, a Lockheed Martin Company,
for the United States Department of Energy's National Nuclear Security Administration
under contract DE-AC04-94AL85000.



Overview

Timeline

- Start – Dec. 2007
- Finish – Sep. 2012
- 80% complete

Budget

- Total project funding
 - DOE \$590K
- Funding received in FY2011
 - \$200 K

Barriers

- A. Future Market Behavior
- B. Stove-piped/Siloed Analytical Capability
- E. Unplanned Studies and Analysis

Targets

Analyze issues and long term impacts related to infrastructure evolution, hydrogen fuel, and vehicles (Task 1)

Relevance

Project Objective	MYPP Systems Analysis Task 1 Activity
Use dynamic models of infrastructure systems to analyze the impacts of widespread deployment of hydrogen technologies	Environmental impact analyses
Analyze contribution of Stationary Fuel Cells (SFC) co-produced H ₂ to early market Hydrogen Fuel Cell Vehicle (HFCV) penetration	Analysis of necessary infrastructure development
Analyze competition between electric vehicles, efficient gasoline vehicles and HFCVs	Analyze the long-term impact of hydrogen fuel and vehicles

Milestones


MM / YYYY	Milestone
05 / 2011	Analyze role of SFC with H2 co-production in enabling HFCV transition. Completed.
09 / 2011	Analyze competition of HFCV and refueling to alternatives of Plug-in Hybrid Electric Vehicles (PHEV) and Battery Electric Vehicles (BEV). Ongoing.

Collaborations

- Directly linked to IEA Task 30: Global H₂ Systems Analysis
 - Task 30 Participants:

Australia	Japan
Canada	Norway
Denmark	Spain
France	Sweden
Germany	United Kingdom
Greece	United States
Italy	
 - Modular software can be extended to other countries or regions
 - Multi-region supply, demand, and dynamics modeling to inform IEA reports
 - World Energy Outlook
 - Energy Technology Perspectives
- Collaboration with Dr. Andy Lutz at U. of the Pacific


Approach: System dynamics modeling to access value of hydrogen FC technologies

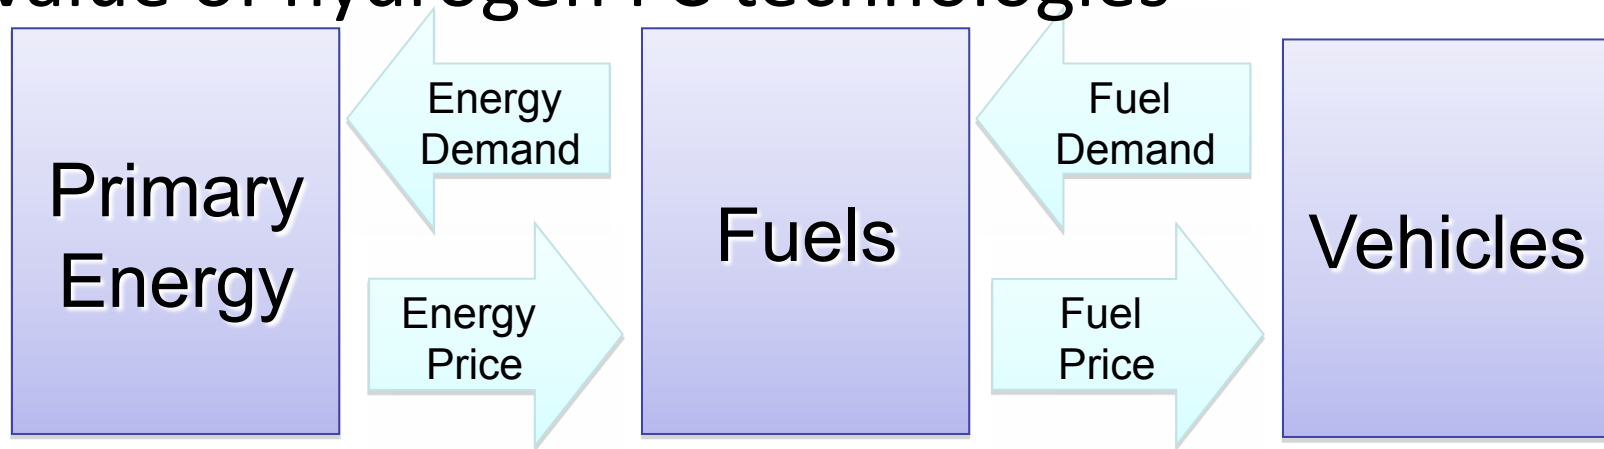

- Choose appropriate regions and vehicle segments to define the system
 - Resources and demand vary by region
 - Alternative vehicle technologies have different performance/capabilities
- Cost will drive decisions
 - Choice factors (e.g. vehicle range) can be converted to cost penalty
- Model legislated and potential improvements to gasoline vehicles
- Pose detailed questions
 - What are the potential reductions of CO₂ emissions and gasoline consumption due to HFCV adoption?
 - What is the value of HFCV in comparison to battery electric vehicles?
 - What effect does stationary FC H₂ co-production have on HFCV penetration?

Approach: Model provides user interface and sensitivity analysis

- Easy-to-use model front end
- Allows sensitivity analysis using Latin hypercube sampling
- Results are displayed on-screen as well as sent to Excel spreadsheet

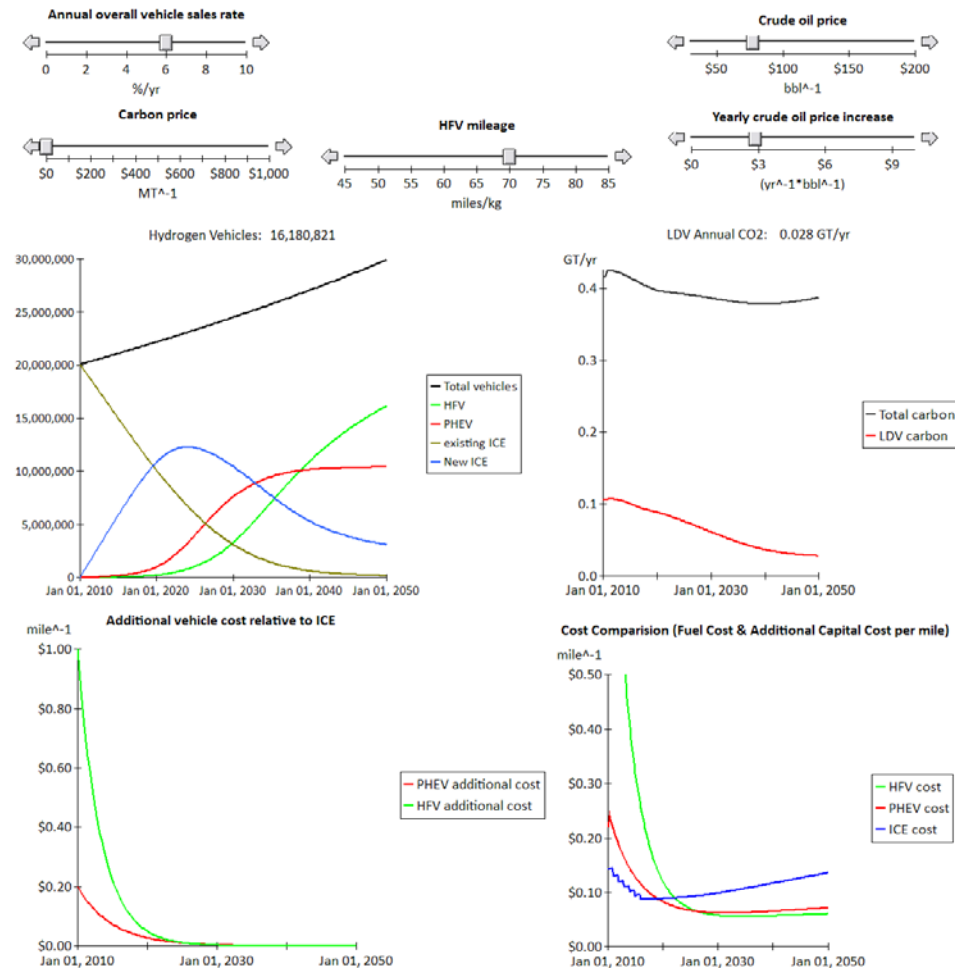


Hydrogen Production Parameters

Electricity Parameters

Technical Progress: More detail for vehicles & fuels to analyze impact of changing vehicle technologies

- Added powertrain and vehicle size to model to analyze up to 15 vehicle subtypes
- Expanded model from 1 geographic region to 8 regions
- Enhanced modeling of future energy sources to include low-carbon options

<u>Powertrains:</u> Conventional ICE, HFCV, PHEV10, PHEV40, BEV	<u>Vehicle size/class:</u> Small Car, Large Car, Truck
<u>Energy sources:</u> Coal, Natural gas, Oil, Wind	<u>Fuels:</u> Gasoline, Hydrogen, Electricity

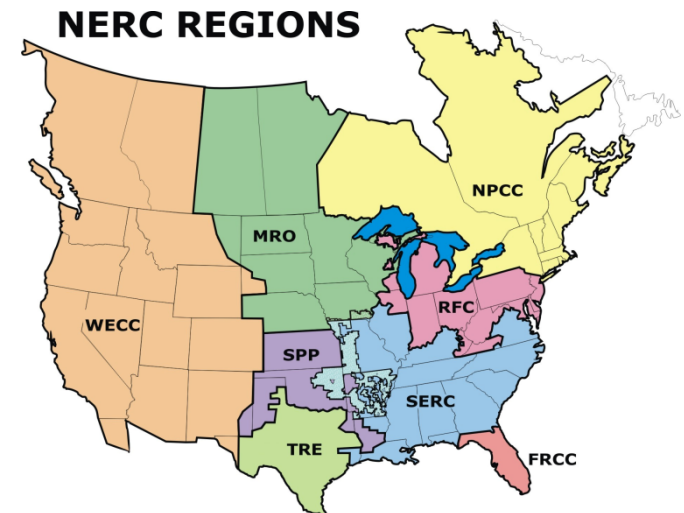

North American Electric Reliability Corporation regions are not geographic regions; our regions approximate NERC regions.

Vehicle Fuel Economy Assumptions

MPGe in 2010/2016/ 2035	Gasoline ICE	HFCV	PHEV10 Gas (77%) Elect (23%)	PHEV40 Gas (37%) Elect (63%)	BEV
Small Car	36/42/45	69/71/76	41/45/56 84/102/136	30/34/47 94/110/148	99/110/148
Large Car	18/30/39	69/71/76	35/39/47 72/87/116	25/29/40 80/94/126	N/A
Truck	18/30/39	69/71/76	20/23/28 42/51/68	N/A	N/A

- Vehicle fuel economy interpolated between points and is fixed at the last value after 2035
- Used EPA vehicle class definitions (not CAFE) - SUVs classified as “large cars”
- Some powertrain/size combinations assumed to be unlikely
- Gasoline internal combustion engine (ICE) powertrain includes hybrids
- Current HFCV values based on Toyota Highlander FCHV-adv report (Wipke *et al*)

Assumptions

Fuel Model

Electric Supply

- Marginal electricity mix for regions calculated from EPA eGrid2009 data by selecting fossil generation units at 0.3-0.6 capacity factor
- Option to fix marginal generation, convert generation to natural gas, or convert to least cost new generation option.

Natural Gas Supply

- EIA price data used to initialize model
- Current distribution system assumed to be at 80% capacity

Gasoline Supply

- Oil price: linear projection, ability to program periodic price spikes. Default oil price is \$90/bbl with \$3/bbl/year increases

Hydrogen Supply

- Distributed steam-methane reforming (SMR)
- Zero-carbon H₂ from wind with central electrolysis
- Cost of distribution decreases as number of vehicles increases
- Choice of energy source based on price inclusive of carbon price

Vehicle Model

- Purchase costs adapted from National Academies reports, “Transitions to Alternative Vehicle Technologies” (2008,2010). Long-term incremental vehicle costs (above conventional) are \$2100 for PHEV10 and HFCV, and \$5500 for PHEV40 and BEV.
- Vehicle age distribution and scrap rate from Department of Transportation (DOT) data
- Sales rate 6.8%, scrap rate 5.9%. Fleet grows at 0.9% per annum, equal to US census bureau projections
- Multinomial logit model based on purchase cost, fuel cost, and penalty factor to determine sales

SFC Model

Large Scale: 500 MW

- High Temp FC system
- Natural Gas (NG) operation with internal reforming
- 50% NG to electric efficiency
- 24% to H₂ in co-production mode
- Performance parameters from FuelCell Energy publications


Penetration extent from California Energy Commission report extrapolated to US

Model provides a tool for examining a range of scenarios

- Key input parameters
 - Vehicles:
 - Fuel economy as a function of time; cost of alternative technologies, learning curve for vehicle cost; sales/discard rates, [payback period for additional purchase cost](#), [availability of powertrain options](#)
 - Electricity:
 - Changes in marginal electric mix, rate of change of marginal electric mix, non-transport demand for electricity
 - Energy Sources:
 - NG price elasticity, Supply curves for zero-carbon energy sources, Availability of inter-regional transport, [Crude oil initial price and rate of increase](#)
 - SFC:
 - Electric efficiency; H₂ co-production efficiency, [fixed & variable costs of H₂ production](#); penetration rate of SFC units
 - Other: [carbon price](#)

Base case: HFCV dominate alternative vehicle fleet by 2045

- With moderate increases in petroleum price (\$3/bbl/yr) and without carbon price, gasoline ICE vehicles are the majority for the first half of this century
- PHEV-40 and BEV are hampered by costs and market segment limitations
- Smaller batteries in PHEV-10 reduce vehicle cost, allowing earlier penetration

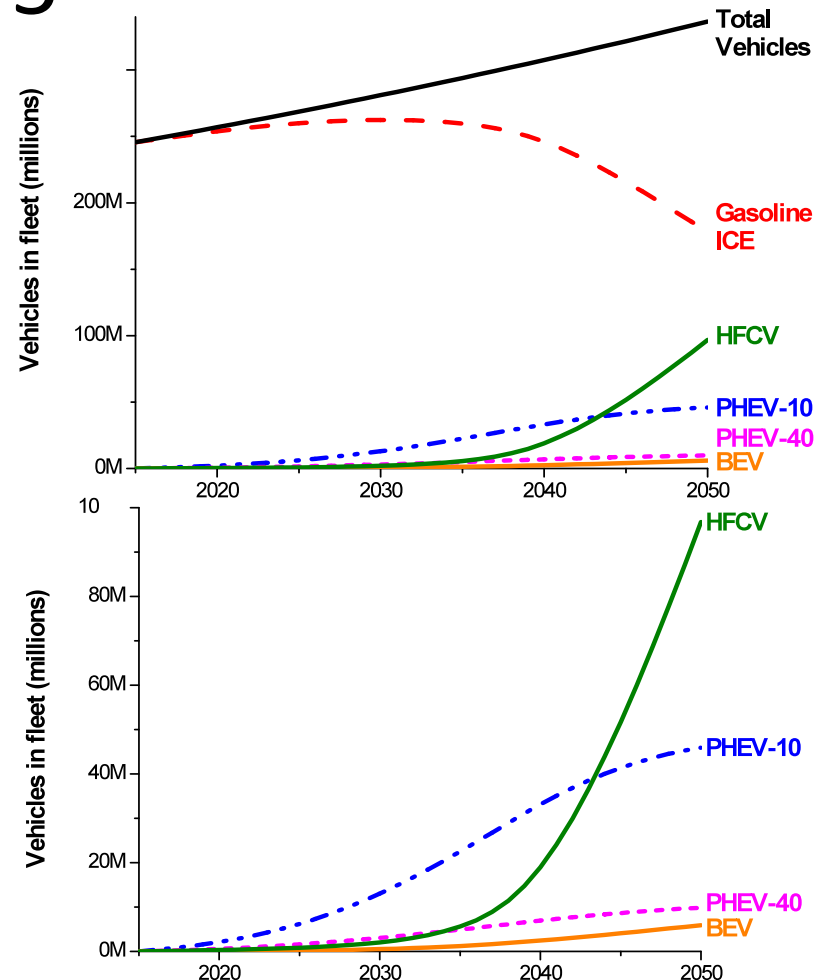


- Hydrogen-fueled vehicles are the dominant alternative vehicle after 2045
- Fleet is half alternative vehicles at 2050
- Hydrogen-fueled vehicles reach 1 million vehicles by 2026

Base case: Alternative fuel vehicle sales accelerate after 2030

Assumptions:

- Improvements in fuel economy for all vehicles
- Reductions in the cost of alternative vehicles
- Carbon policy not considered


Shape and timing of HFCV sales rate is consistent with HyTrans results (Greene *et al*, ORNL 2008)

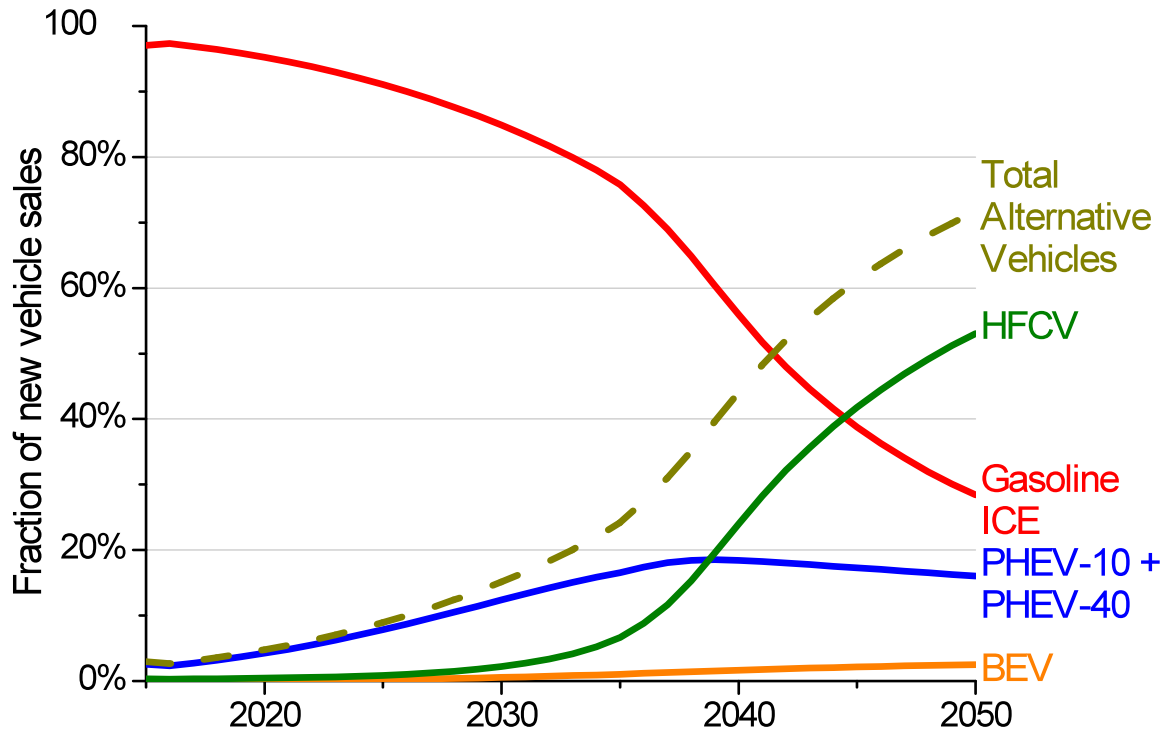

- Gasoline ICE sales fall below 50% in 2040
- Alternative vehicles make up 75% of new vehicle sales at mid-century (~17 M vehicles/year)


Base case: Powertrain choice varies with size of vehicle

- Large car segment
 - Higher proportion of alternative vehicles due to larger difference in fuel consumption
- Small car segment
 - Small ICEs already efficient
 - Fuel savings of alternative vehicles is small compared to additional purchase costs
- Changing vehicle cost or gasoline price assumptions changes both the penetration and distribution of hydrogen vehicles

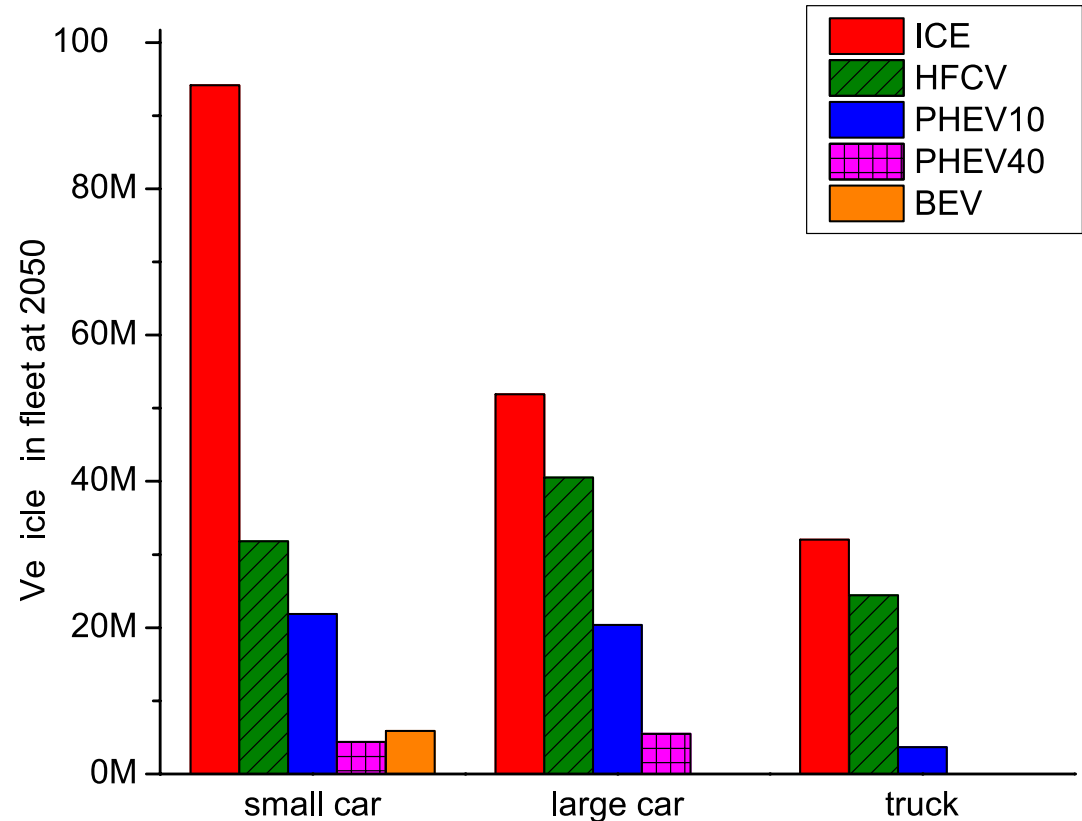


Base case: Large reductions in both gasoline use and GHG emissions from new vehicle technologies

- Significant gasoline use reduction, despite increase in population & vehicles
 - Increases 0.9% per year, total increase 37% from 2015 to 2050
- Gasoline demand in 2050 is within the technical limit of domestic biofuel production
 - About 60 B gallon gasoline equivalent (GGE) per year
- Gasoline ICE improvements alone would achieve 25% reduction in GHG emissions and gasoline use (relative to 2015)

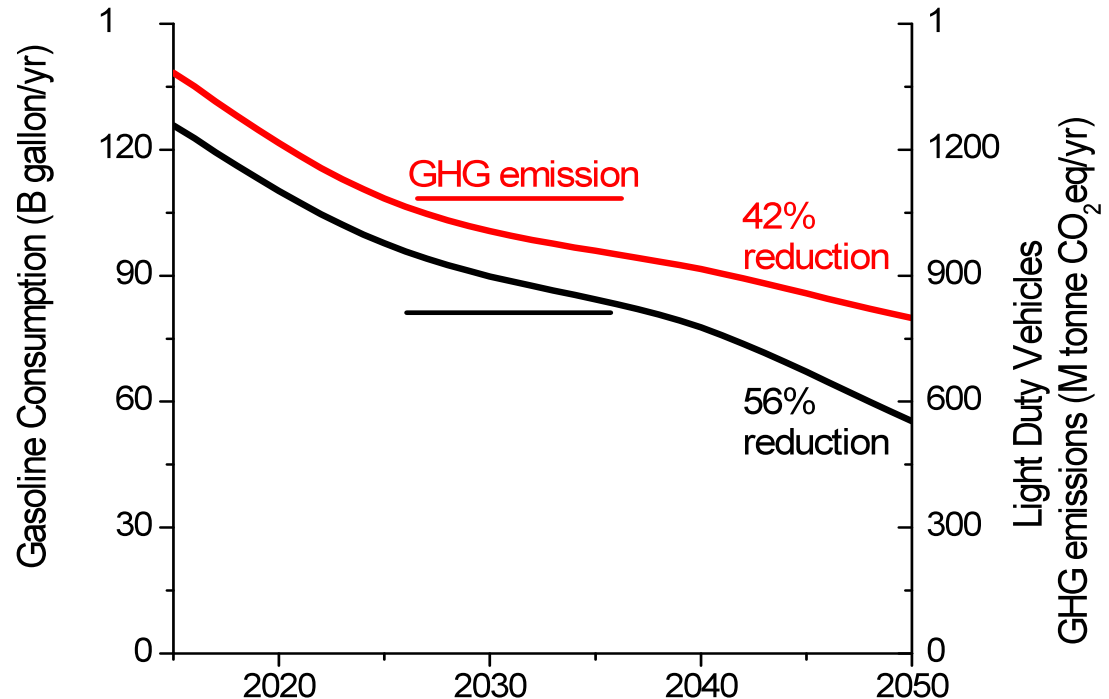


Without higher gasoline costs, alternative vehicles are minor portion of fleet

- Oil price constant at \$90/bbl
- No carbon price
- Gasoline ICE continue to improve
- Fuel savings is not sufficient to support purchase of alternative-fueled vehicles
- Model does not presuppose success of alternative vehicles

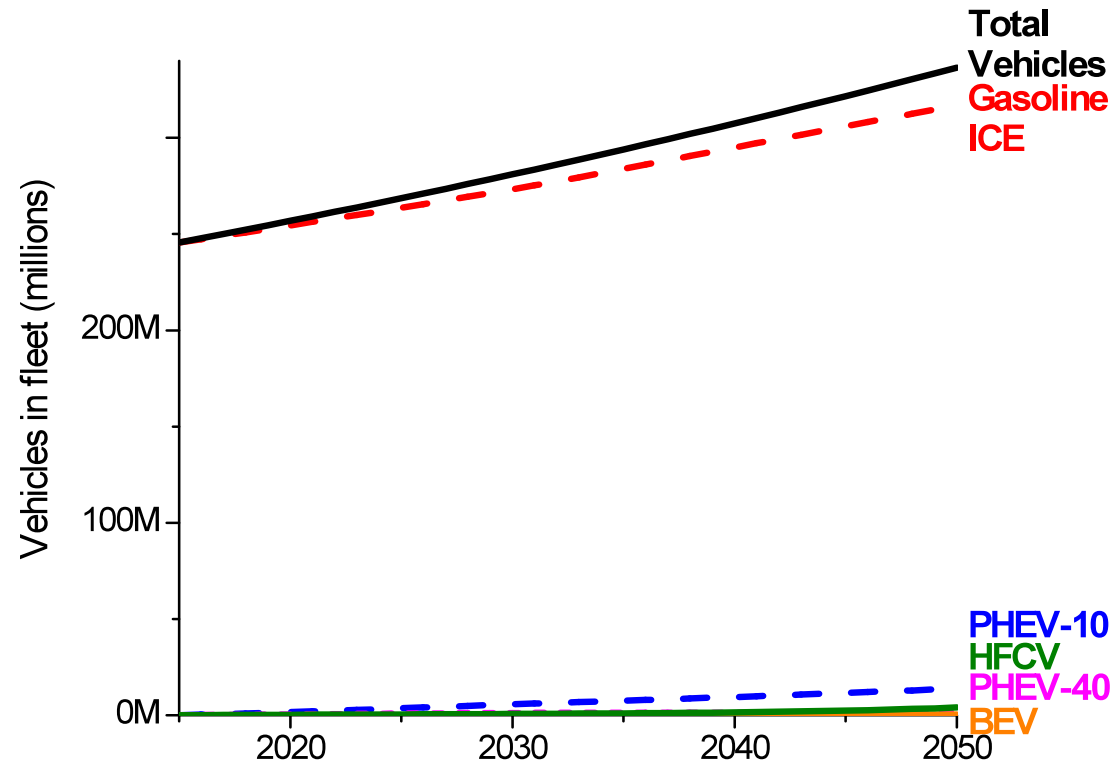


High carbon price increases hydrogen vehicle penetration

- Model allows hydrogen production from natural gas or wind electricity
- Carbon price increases the total number of HFCV and causes earlier introduction
- However, significant carbon price is required to have large impact on hydrogen vehicle sales

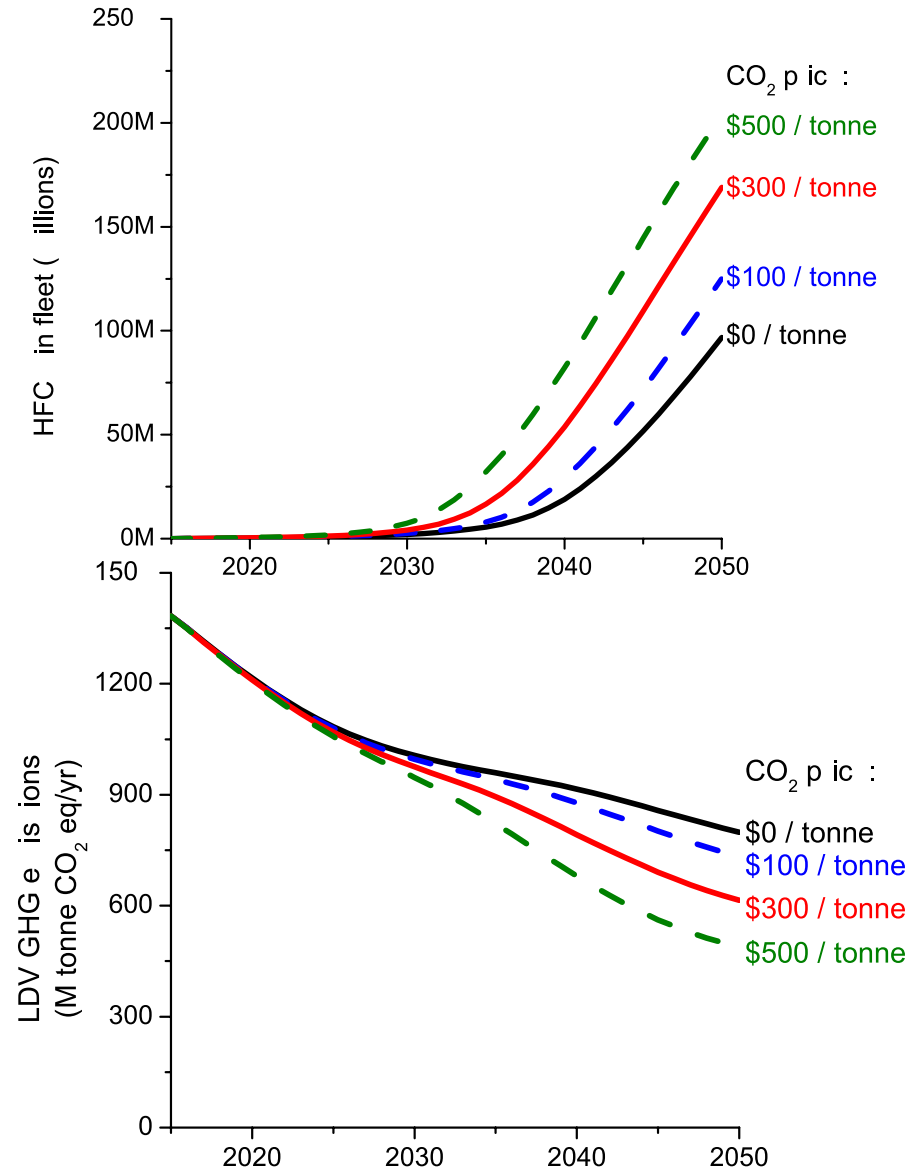

Payback period is a critical parameter for HFCV sales and GHG emissions

- Greene reports consumers use 1.5 to 2.5 year payback period
- Baseline assumption: 3 year period for consumer choice
- Changing from 3 to 5 years to recoup purchase price increases HFCV by 50% and saves >100 M tonne CO₂/year
- Achieving the same reduction with carbon price requires \$175/tonne price.

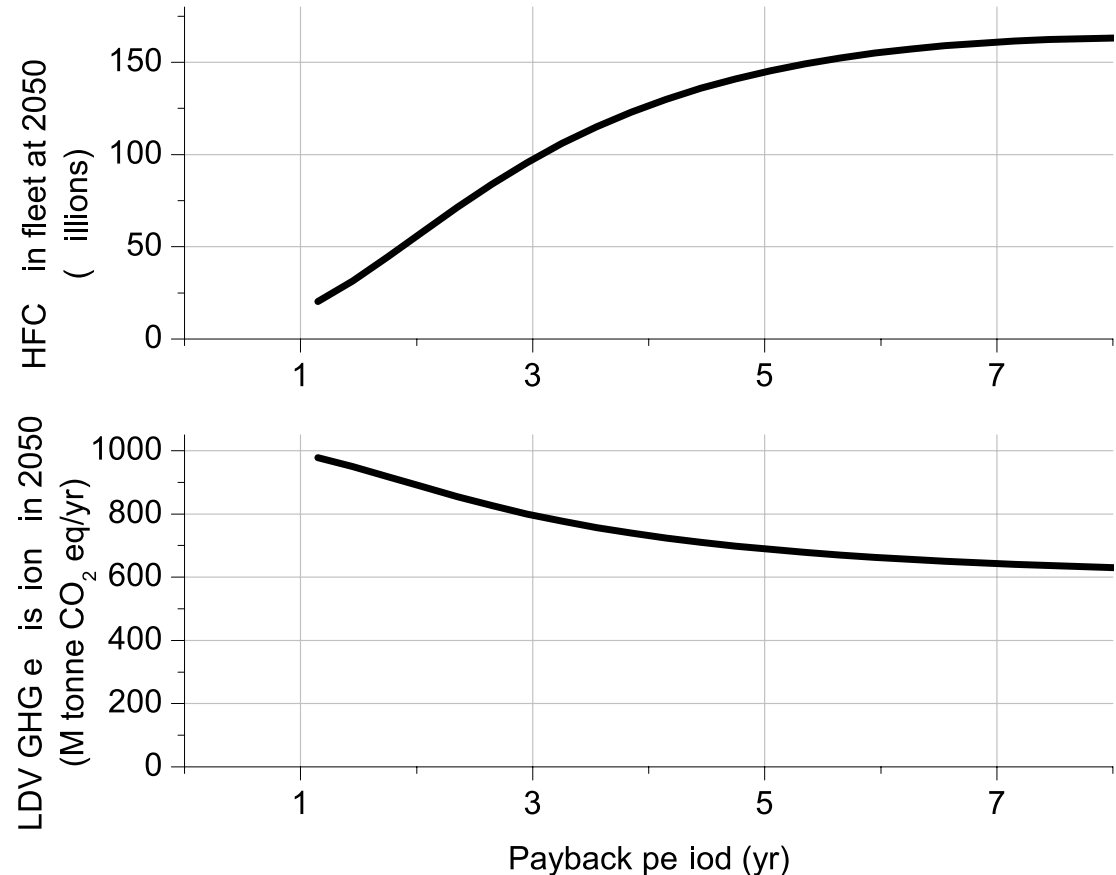


Hydrogen vehicles have a larger impact on emissions & oil use than battery electric vehicles

- Large-scale use of hydrogen or battery electric vehicles will require infrastructure investment and R&D progress.
- However, the impact of these technologies is not equal.


Gasoline use

Oil Price	ICE +PHEV	ICE +PHEV +BEV	ICE +PHEV +HFCV	ICE +PHEV +HFCV +BEV
\$90/bbl, no increase	92.7 B gal/yr	92.6 B gal/yr	91.4 B gal/yr	91.3 B gal/yr
\$90/bbl → \$195/bbl	84.5 B gal/yr	82.6 B gal/yr	56.2 B gal/yr	55.3 B gal/yr
\$90/bbl → \$265/bbl	79.6 B gal/yr	75.6 B gal/yr	40.5 B gal/yr	39.2 B gal/yr

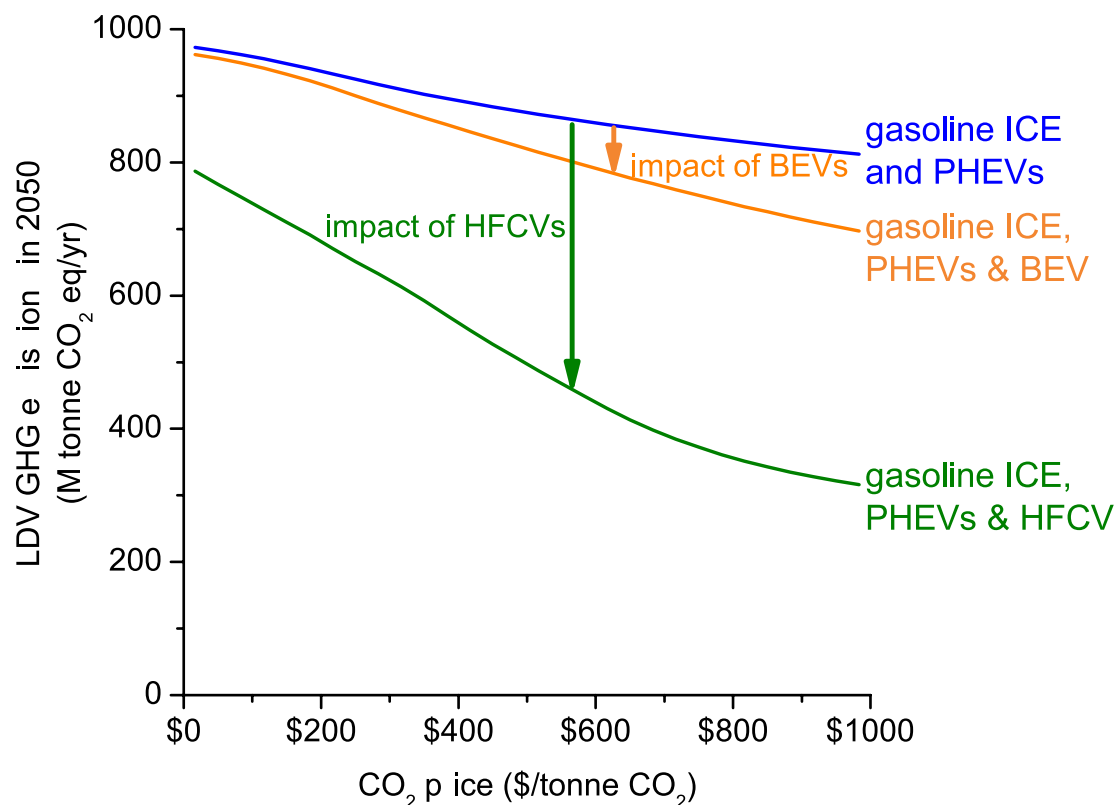


Emissions benefits from SFC for distributed generation vary by region

- Benefits are significant in regions with coal-fired marginal generation
- Absolute value of emissions reduction depends on SFC penetration rate

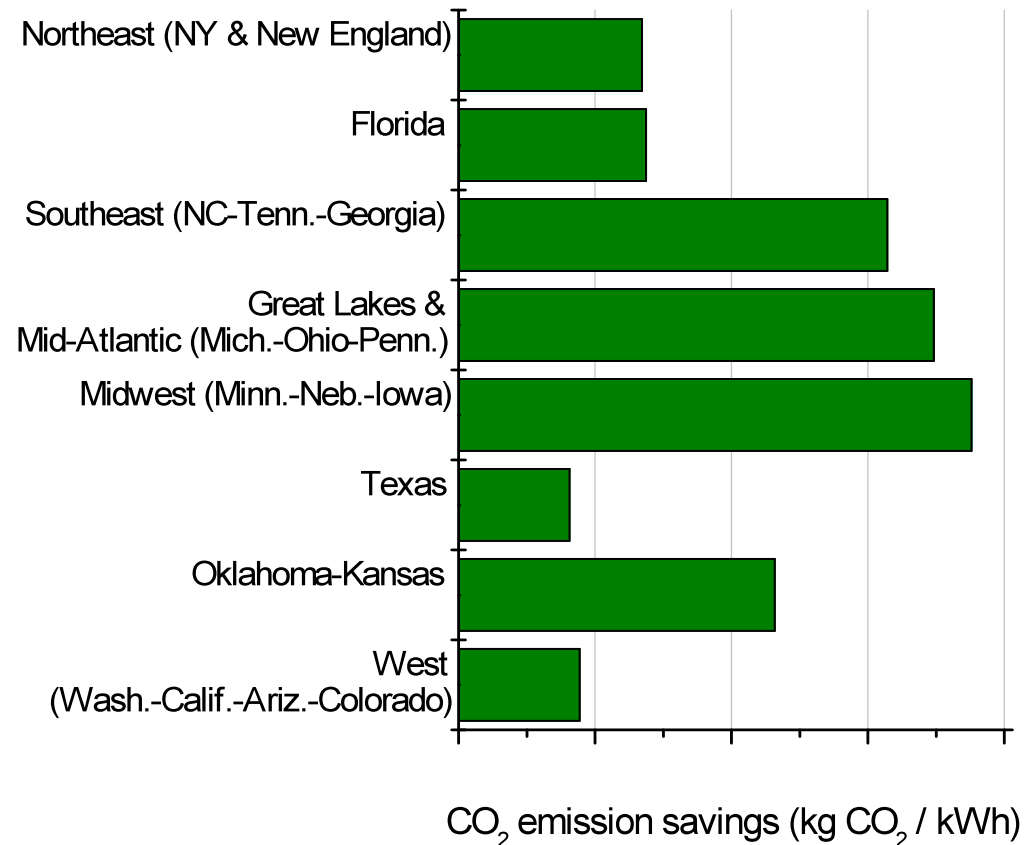

SFC hydrogen availability could change early adoption behavior

- SFC hydrogen co-production increases initial HFCV penetration
- Effect is significant if filling station capital and maintenance costs are subsidized or otherwise reduced

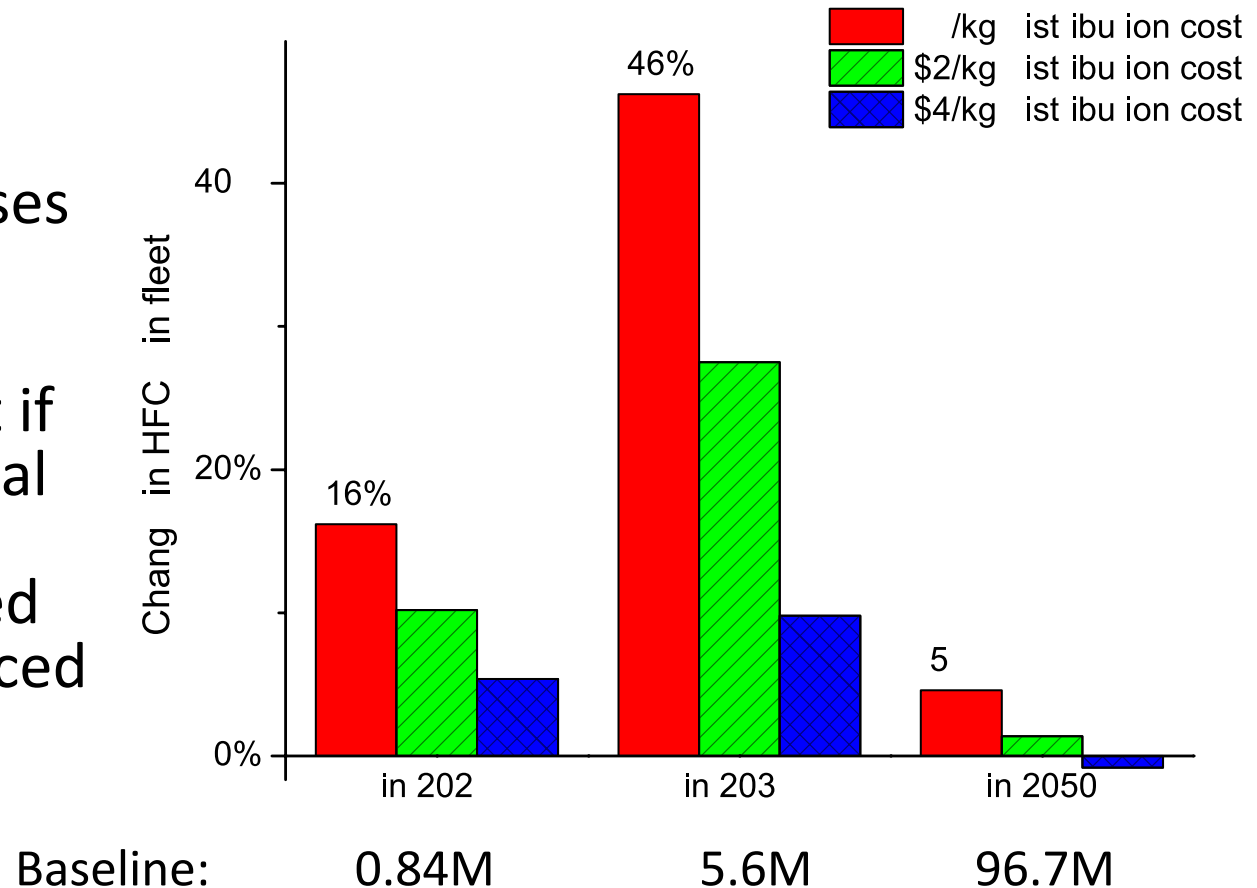

Summary

- Increasing oil prices and/or policies that give a price to carbon are needed for significant numbers of HFV to penetrate the light duty vehicle fleet.
 - At moderate oil price increases, our analysis predicts 50% hydrogen and electric vehicles by 2050.
- Hydrogen vehicles would allow significant GHG emission and gasoline use reductions.
 - Over 50% decrease in gasoline use in 2050 (relative to 2015 levels)
 - Hydrogen vehicles are predicted to have much larger effect than battery electric vehicles.
 - Our model shows a high sensitivity to the payback period used for consumer vehicle choice. Policies that address the consumer's view of fuel saving and purchase price could have significant effect on emissions.
- H₂ co-produced from SFC could have impact on early vehicle adoption rates.
 - Up to 46% increase in H₂ vehicles in 2035

Future Work

- Remainder of FY11:
 - Increase the number of hydrogen production pathways modeled
 - Incorporate higher resolution energy source data
- FY12:
 - Consider coupling of system dynamics tools to Macro-System Model
 - Include detail on inter-regional energy and fuel transport
 - Examine infrastructure costs, such as natural gas transportation and distribution networks
 - Include ability to examine more complex carbon policies